



150 °C Series



Platinum temperature sensor with wires

For low temperatures




Benefits & characteristics

- Excellent long-term stability
- Low self-heating
- Fast response time
- Metallized backside available
- Customer-specific sensors available upon request



Illustration ¹⁾

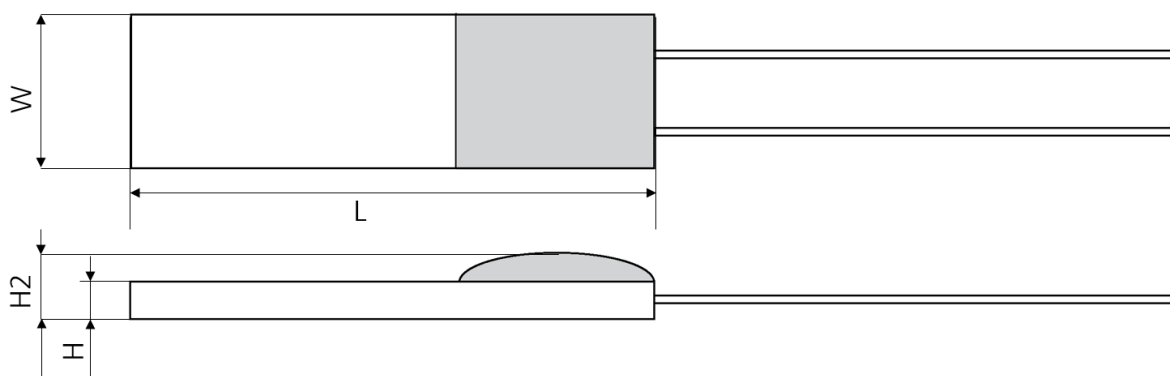

¹⁾ for actual size see dimensions in order information

H = Substrate Height

H2 = Height

W = Width

L = Length

Dimension tolerances:

W ± 0.2 mm, L ± 0.2 mm, H ± 0.1 mm, H2 ± 0.3 mm



Technical data



Operating temperature range: -50 °C to +150 °C



Nominal resistance:*

100 Ω at 0 °C

500 Ω at 0 °C

1000 Ω at 0 °C



Characteristics curve:*

3850 ppm/K



Long-term stability: < 0.04 % at 1000 h at maximal operating temperature



Tolerance class: * **iST reference**

(dependent on temperature range)

IEC 60751 F0.15 A

IEC 60751 F0.3 B

IEC 60751 F0.6 C

IEC 60751 F0.1 Y



Connection:*

Enameled Cu-wire, $\varnothing$ 0.2 mm

Alternative wire construction: *

Inverted wires

Extended wires

Recommended applied current:¹⁾ 1 mA at 100 Ω

¹⁾Self-heating must be considered 0.5 mA at 500 Ω

0.3 mA at 1000 Ω

Other alternatives:*

- Metallized backside
- Housed in round ceramics (for dry environments only)
- Grouped and paired
- Substrate thickness
- Wire length
- Temperature range

* Customer-specific alternatives available



Order Information

Nominal Resistance at 0 °C	Size	Dimensions (L x W x H / H2 in mm) L ±0.2, W ±0.2, H ±0.1, H2 ±0.3 mm	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
----------------------------	------	---	--------	------------	------------------------------------	-------------------	---------

1E: Enameled Cu-wire Ø 0.2 mm

100 Ω	161	1.6 x 1.2 x 0.25 / 0.6	F0.15 (class A)	100748	P0K1.161.1E.B.200	200	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6	F0.3 (class B)	150634	P1K0.161.1E.A.040	40	
1000 Ω	161	1.6 x 1.2 x 0.25 / 0.6	F0.3 (class B)	101010	P1K0.161.1E.B.020	20	
1000 Ω	202	2.2 x 2.0 x 0.65 / 1.3	F0.3 (class B)	101553	P1K0.202.1E.B.120	120	
100 Ω	232	2.3 x 2.0 x 0.65 / 1.3	F0.3 (class B)	101064	P0K1.232.1E.B.015.M		Metallized backside

1E: Enameled Cu-wire Ø 0.15 mm

100 Ω	308	3.0 x 0.8 x 0.25 / 0.6	F0.15 (class A)	101805	P0K1.308.1E.A.025	25	
100 Ω	308	3.0 x 0.8 x 0.25 / 0.6	F0.3 (class B)	100720	P0K1.308.1E.B.100	100	
1000 Ω	308	3.0 x 0.8 x 0.25 / 0.6	F0.15 (class A)	101324	P1K0.308.1E.A.025	25	
1000 Ω	308	3.0 x 0.8 x 0.25 / 0.6	F0.3 (class B)	101559	P1K0.308.1E.B.035	35	

*Alternative class for each product is available upon request

Additional documents

Application note	Document name:	ATP_E
------------------	----------------	-------



Order Information

Platinum Sensor - Secondary reference

Material

P = Platinum

TCR

= Pt 3850 ppm/K G = Pt 3911 ppm/K
U = Pt 3750 ppm/K W = Pt 3850 ppm/K (extended operating temperature range in class A)

Resistance in Ω at 0°C

Size in mm

Operating temperature range

1 = -50 °C to + 150 °C	6 = -200 °C to + 600 °C
2 = -50 °C to + 200 °C	7 = -200 °C to + 750 °C
3 = -200 °C to + 300 °C	8 = -200 °C to + 850 °C
4 = -200 °C to + 400 °C	10 = -70 °C to + 1000 °C

Connections

S = SIL	FK = Flat wire customer specific
I = Insulated wire	SW = Perpendicular wire
K = Extended wire	L = Insulated stranded wire
W = Wire	E = Enameled Cu-wire
FW = Flat wire	SE = Perpendicular enameled Cu-wire

Tolerance class

A = IEC 60751 F0.15	K = Customer-specific
B = IEC 60751 F0.3	P = Pair
C = IEC 60751 F0.6	G = Group
Y = IEC 60751 F0.1	

Wire length in mm

Special

T = Substrate thickness 0.25 mm	M = Metallized backside
D = Substrate thickness 0.38 mm	U = Inverted welding
R = Round housing	S = Special
W = Sintered powder	

P OK1. 232. 1 E. B. 010. M



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

Technical specifications are subject to change without prior notice. The information contained in this data sheet has been carefully reviewed and is believed to be accurate; however, no liability is assumed for any errors or omissions. Continuous exposure to extreme operating conditions may impact product lifetime or reliability. The customer is solely responsible for assessing the suitability and fitness of the product for their specific application. This product is not designed, authorized, or warranted for use in life support or safety-critical applications. The customer agrees to hold the supplier harmless from any claims, damages, or liabilities arising from such use. No explicit or implied warranties, including but not limited to warranties of merchantability or fitness for a particular purpose, are provided. The material provided herein may not be reproduced, adapted, merged, translated, stored, or utilized in any form without prior written consent from the copyright holder. No transfer of any intellectual property rights is granted or implied. All rights reserved.